

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number
WO 2005/072006 A1

(51) International Patent Classification⁷: **H04R 7/06**

(74) Agent: **LAITINEN, Pauli, S.**; Patentti-Laitinen OY, P.O. Box 29, FI-02771 Espoo (FI).

(21) International Application Number:
PCT/FI2005/000023

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 17 January 2005 (17.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20040093 22 January 2004 (22.01.2004) FI

(71) Applicant (for all designated States except US): **OY NORTH WAVE LTD** [FI/FI]; Särkitie 14D, FI-02170 Espoo (FI).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TURUNEN, Ilkka** [FI/FI]; Särkitie 14D, FI-02170 Espoo (FI). **PENTTILÄ, Sami** [FI/FI]; Mesikämmen 16, FI-40400 Jyväskylä (FI).

[Continued on next page]

(54) Title: LOUDSPEAKER

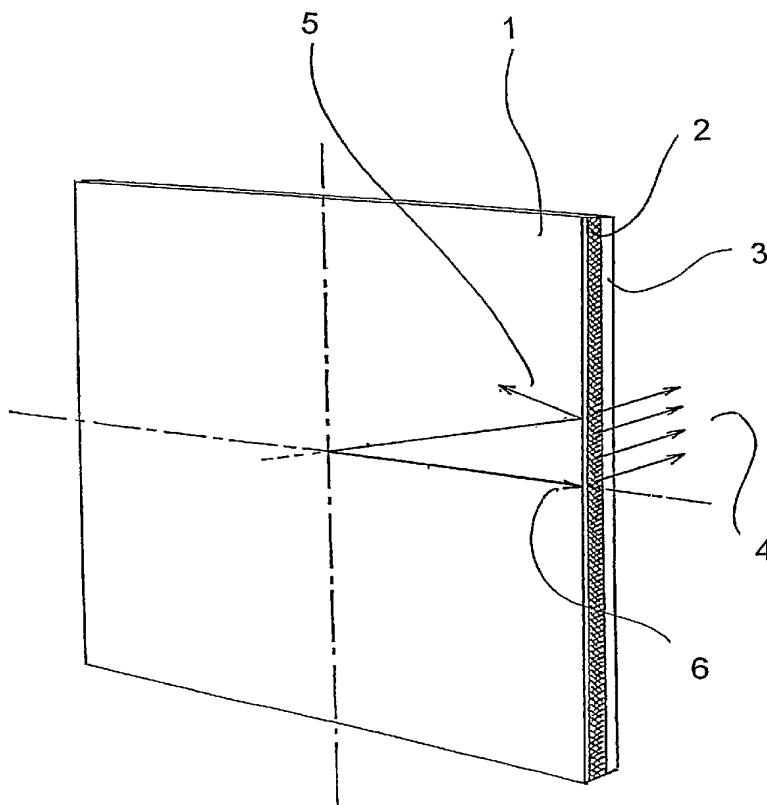

(57) Abstract: The invention relates to a loudspeaker, particularly a so-called planar loudspeaker, the vibrating diaphragm of which is essentially planar and is attached by its edges to the body (3) of the loudspeaker. There is a resilient intermediate piece (2) between the diaphragm (1) and the body (3), there is a resilient intermediate piece (2), which is located essentially around the entire edge area of the diaphragm (1). The intermediate piece (2) may be, for example, of a resilient rubber or plastic-based material.

WO 2005/072006 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*